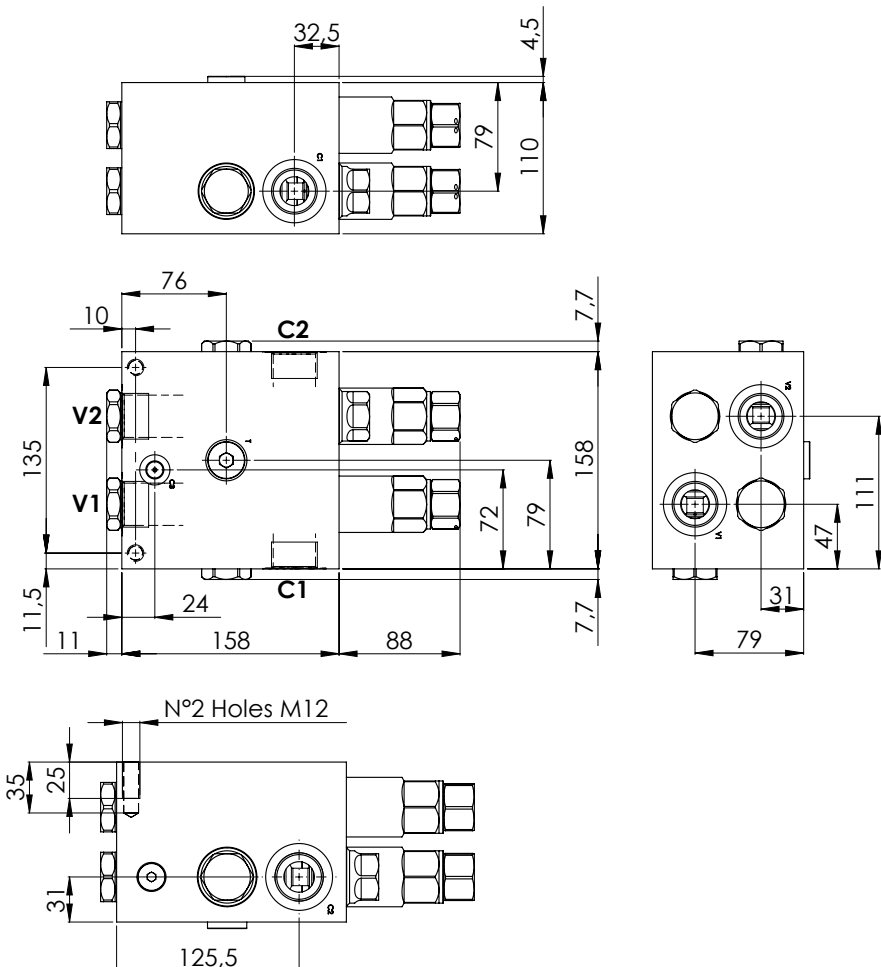

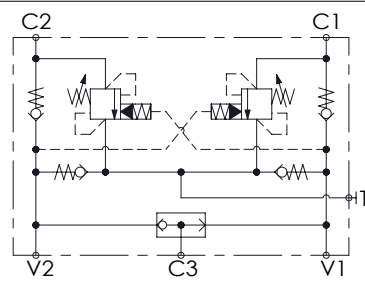
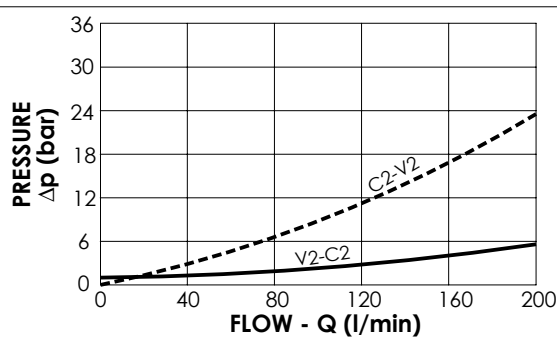


MOTION CONTROL													
MNDN-200-LLSV		SOFT STOP WITH BRAKE RELEASE											
			 										
			SPECIFICATIONS <table><tr><td>Max. operating pressure:</td><td>300 bar</td></tr><tr><td>Rated flow:</td><td>200 l/min</td></tr><tr><td>Manifold:</td><td>Aluminium</td></tr><tr><td>Weight:</td><td>9,74 kg</td></tr></table>			Max. operating pressure:	300 bar	Rated flow:	200 l/min	Manifold:	Aluminium	Weight:	9,74 kg
Max. operating pressure:	300 bar												
Rated flow:	200 l/min												
Manifold:	Aluminium												
Weight:	9,74 kg												
			NOTES Setting: at least 1.3 times the load induced pressure										
ORDERING CODES													
Quick code	Description	Pilot ratio	Main ports size	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)							
MN000021	MNDN-200-LLSV-08-G10-N300	8:1	V1,V2,C1,C2: G1" T: G1/2"; C3: G 1/4"	150	120-300	65							