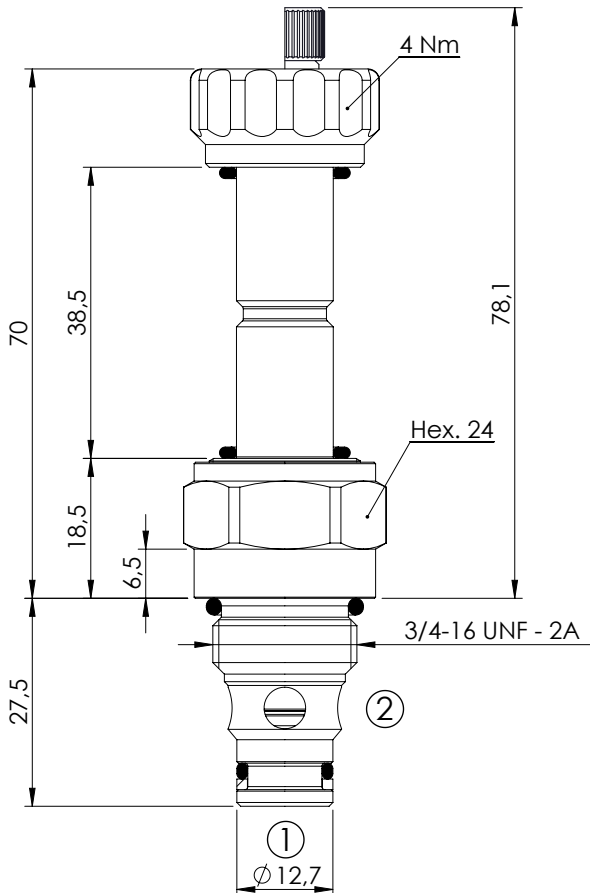


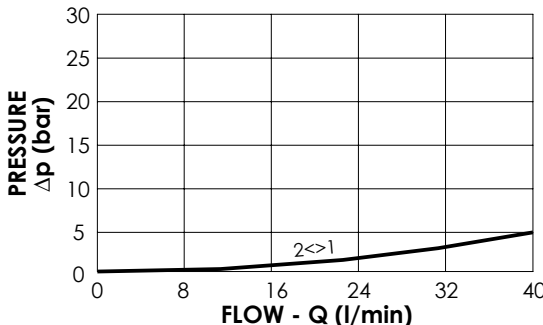




SOLENOID OPERATED CARTRIDGE				
CEBN-040-NCFN		PILOT OPERATED POPPET TYPE		
		 		
		SPECIFICATIONS		
		Max. operating pressure: 350/500 bar		
		Rated flow: 40 l/min		
		Cavity: SAE-08-2N		
		Weight: 0,13 kg		
Min. voltage required: 90% of nominal				
Coil type: M7 type				
Seal kit: RA700081				
		NOTES		
		Installation torque: 45 - 50 Nm		
		OPTIONS		
		 Standard	 Knob style override	
ORDERING CODES				
Quick code	Description	Options	Max operating pressure (bar)	
CE000218	CEBN-040-NCFN-05-S08-N350	Standard	350	
CE000220	CEBN-040-NCFK-05-S08-N350	Knob style override	350	
CE000518	CEBN-040-NCFN-05-S08-N500	Standard	500	
CE000520	CEBN-040-NCFK-05-S08-N500	Knob style override	500	