

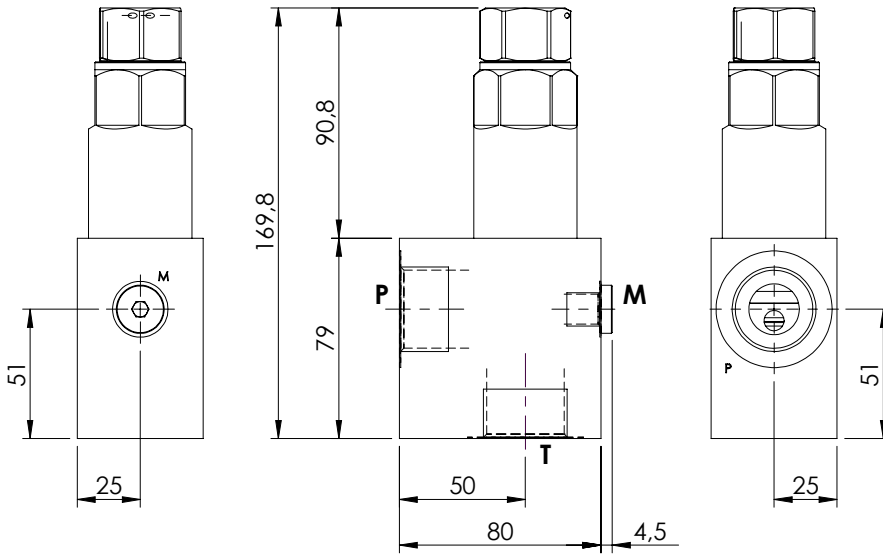



RELIEF VALVE


KPLN-250-DHGD

DIFFERENTIAL AREA
POPET TYPE



SPECIFICATIONS

Max. operating pressure:	350 bar
Rated flow:	250 l/min
Manifold:	Steel
Weight:	2,73 kg

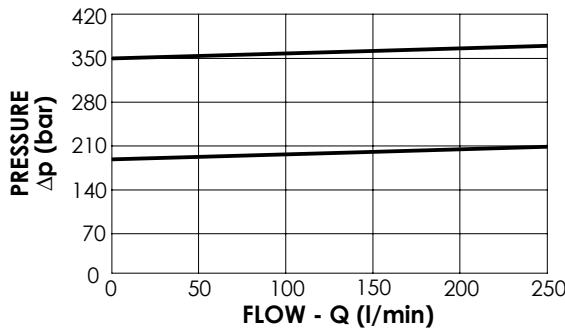

ORDERING CODES

Quick code	Description	Main ports size	Standard setting (bar, Q=5 l/min)	Adjustm. range (bar)	Pressure increase (bar/turn)
KP000068	KPLN-250-DHGD-HN-G10-N350	P,T: G 1" ; M: G 1/4"	350	120-350	65
KP000103	KPLN-250-DHGD-HN-G10-N200	P,T: G 1" ; M: G 1/4"	200	50-200	38