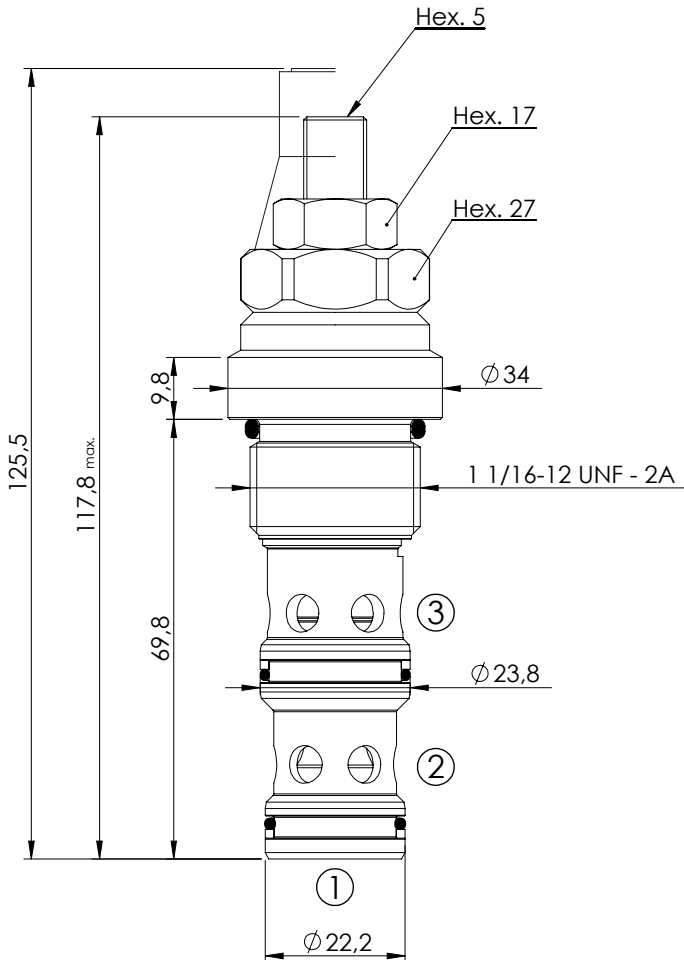


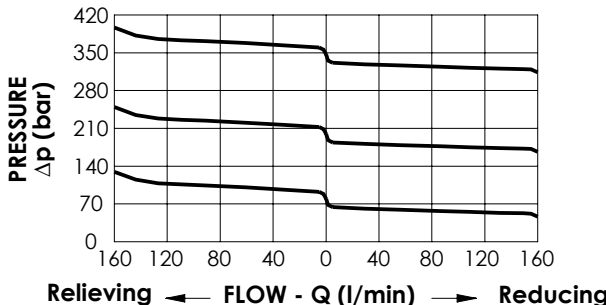



PRESSURE REDUCING AND RELIEVING					
CPRL-140-PNNR		PILOT OPERATED SPOOL TYPE			
		 			
		SPECIFICATIONS			
		Max. operating pressure: 350 bar			
		Rated flow: 140 l/min			
		Cavity: SAE-12-3N			
Weight: 0,34 kg		Installation torque: 80 - 92 Nm			
Seal kit: RA700093		SEALING CAP			
Ordering code: AT000022					
		OPTIONS			
		 Adjustment with Screw			
ORDERING CODES					
Quick code	Description	Standard setting (bar)	Adjust. range (bar)	Pressure increase (bar/turn)	Options
CR000020	CPRL-140-PNNR-HN-S12-N350	300	140-350	114	Adjustment with Screw
CR000019	CPRL-140-PNNR-HN-S12-N200	200	70-250	69	Adjustment with Screw
CR000018	CPRL-140-PNNR-HN-S12-N100	100	10-140	37	Adjustment with Screw