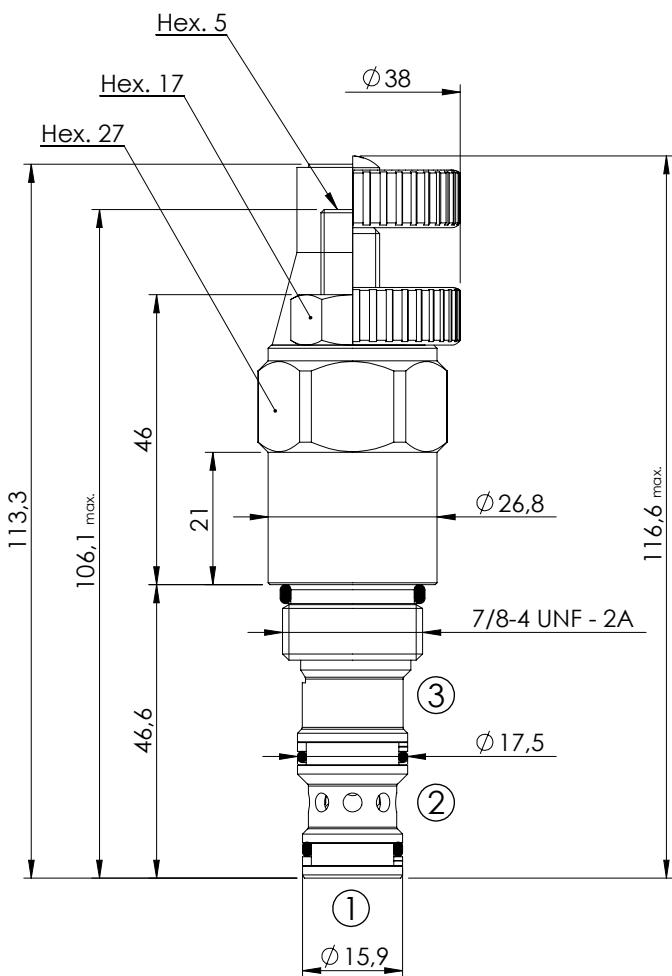


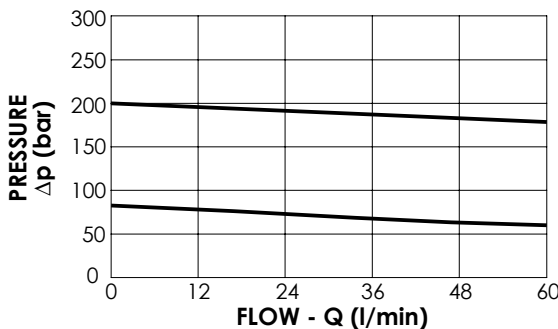



PRESSURE REDUCING					
CPRR-060-PNNR		PILOT OPERATED SPOOL TYPE			
		 			
		SPECIFICATIONS			
		Max. operating pressure: 350 bar			
		Rated flow: 60 l/min			
		Cavity: SAE-10-3N			
		Weight: 0,26 kg			
Installation torque: 45 - 60 Nm					
Seal kit: RA700092					
SEALING CAP		Ordering code: 			
AT000022					
OPTIONS					
 Adjustment with Screw		 Adjustment with Handknob			
ORDERING CODES					
Quick code	Description	Standard setting (bar)	Adjust. range (bar)	Pressure increase (bar/turn)	Options
CR000022	CPRR-060-PNNR-HN-S10-N300	200	70-350	114	Adjustment with Screw
CR000023	CPRR-060-PNNR-VN-S10-N300	200	70-350	114	Adjustment with Handknob
CR000024	CPRR-060-PNNR-HN-S10-N100	80	20-110	37	Adjustment with Screw
CR000021	CPRR-060-PNNR-VN-S10-N100	80	20-110	37	Adjustment with Handknob