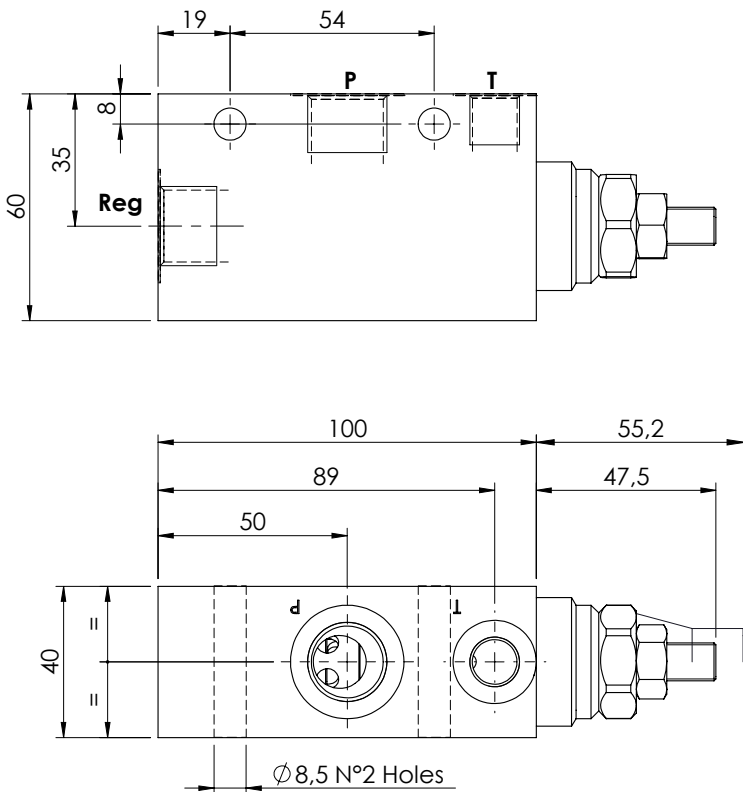

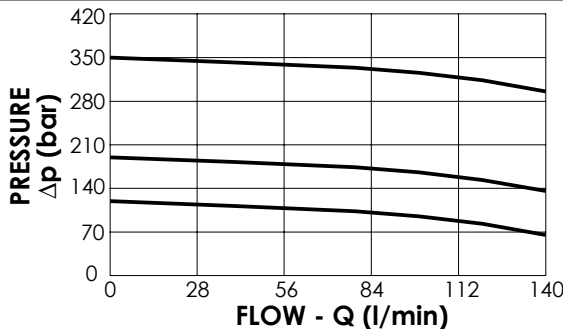
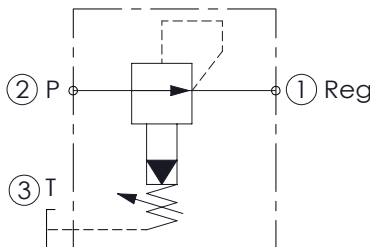




PRESSURE REDUCING IN BODY						
KPRR-140-PNNR		PILOT OPERATED SPOOL TYPE				
						
						
			SPECIFICATIONS			
			Max. operating pressure: 250 bar			
			Rated flow: 140 l/min			
			Cavity: SAE-12-3N			
Weight: 0.8 kg						
Manifold: Aluminium						
SEALING CAP						
Ordering code: AT000022						
						
OPTIONS						
 Adjustment with Screw						
ORDERING CODES						
Quick code	Description	Ports	Standard setting (bar)	Adjust. range (bar)	Pressure increase (bar/turn)	Options
KR000017	KPRR-140-PNNR-HN-G12-N350	P-Reg : G 1/2" T : G 1/4"	300	140-350	114	Adjustment with Screw
KR000019	KPRR-140-PNNR-HN-G12-N200	P-Reg : G 1/2" T : G 1/4"	200	70-210	69	Adjustment with Screw
KR000018	KPRR-140-PNNR-HN-G12-N100	P-Reg : G 1/2" T : G 1/4"	100	10-120	37	Adjustment with Screw