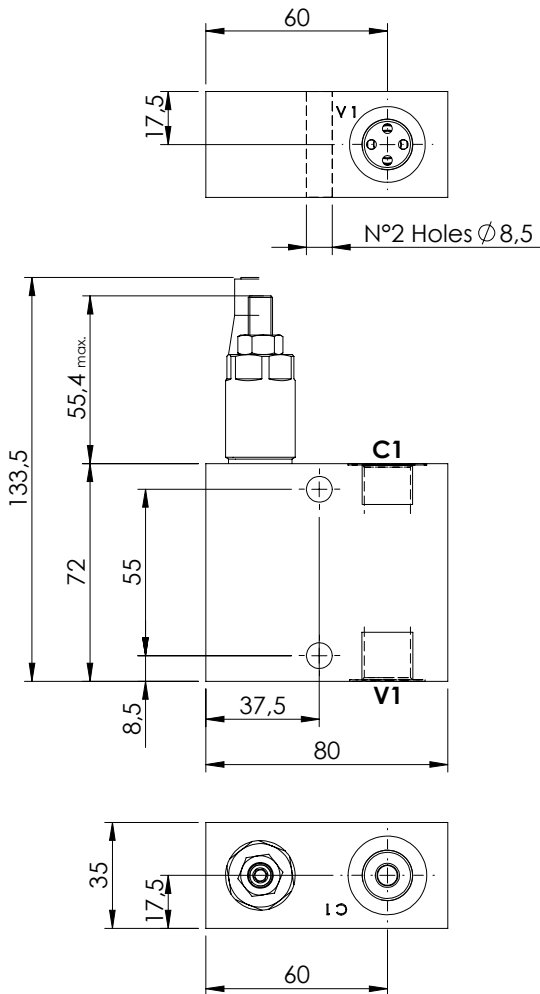



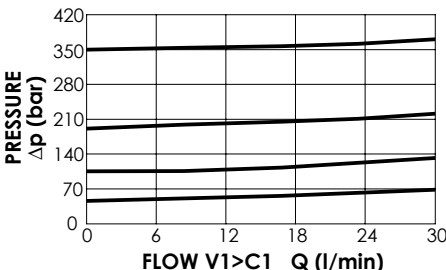
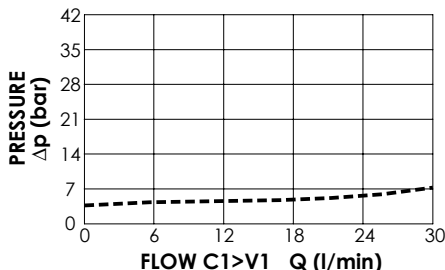


SEQUENCE VALVE IN BODY					
KPSN-030-DPNA				DIRECT ACTING STABILIZED PISTON NOT COMPENSATED	
					
					
		SPECIFICATIONS Max. operating pressure: 350 bar Rated flow: 30 l/min Manifold: Aluminium Weight: 0,65 kg			
		SEALING CAP Ordering code: AT000020 			
					
ORDERING CODES					
Quick code	Description	Main ports size	Standard setting (bar, Q=5 l/min)	Adjustm. range (bar)	Pressure increase (bar/turn)
KP000036	KPSN-030-DPNA-HN-G38-N350	C1, V1: G 3/8"	350	100-350	91
KP000033	KPSN-030-DPNA-HN-G38-N200	C1, V1: G 3/8"	200	50-210	42
KP000035	KPSN-030-DPNA-HN-G38-N100	C1, V1: G 3/8"	100	30-100	20
KP000034	KPSN-030-DPNA-HN-G38-N050	C1, V1: G 3/8"	50	10-50	10