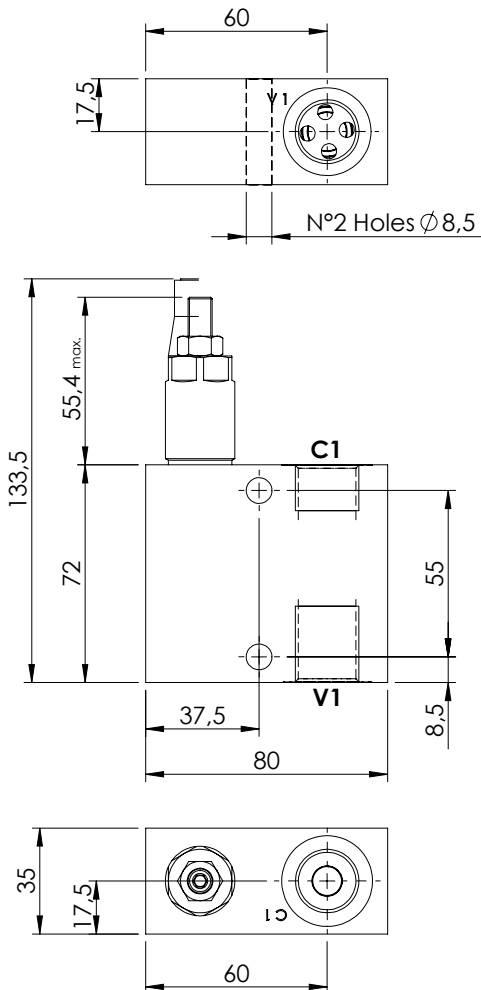



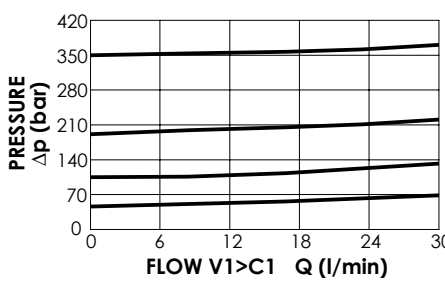
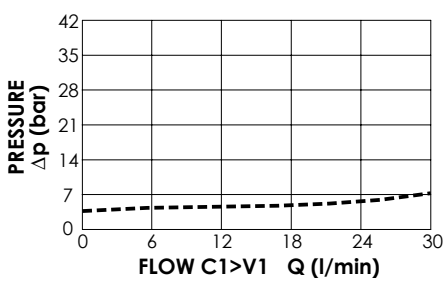


SEQUENCE VALVE IN BODY					
KPSN-030-DPNA	DIRECT ACTING STABILIZED PISTON NOT COMPENSATED				
					
					
SPECIFICATIONS					
Max. operating pressure:		350 bar			
Rated flow:		30 l/min			
Manifold:		Aluminium			
Weight:		0,64 kg			
SEALING CAP					
Ordering code: AT000020					
					
ORDERING CODES					
Quick code	Description	Main ports size	Standard setting (bar, Q=5 l/min)	Adjustm. range (bar)	Pressure increase (bar/turn)
KP000061	KPSN-030-DPNA-HN-G12-N350	C1, V1: G 1/2"	350	100-350	91
KP000062	KPSN-030-DPNA-HN-G12-N200	C1, V1: G 1/2"	200	50-210	42
KP000060	KPSN-030-DPNA-HN-G12-N100	C1, V1: G 1/2"	100	30-100	20
KP000063	KPSN-030-DPNA-HN-G12-N050	C1, V1: G 1/2"	50	10-50	10