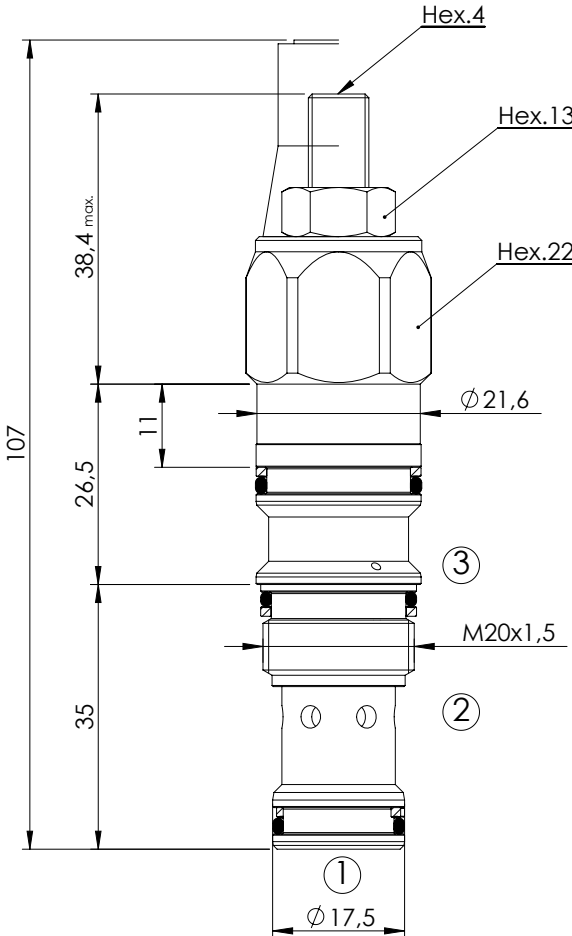


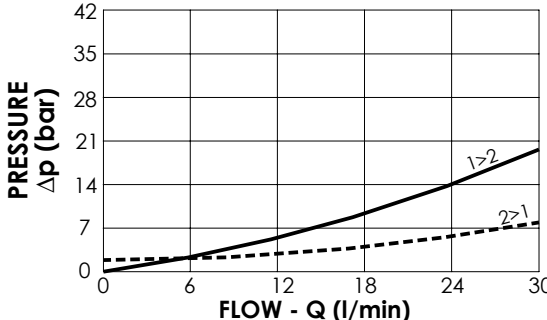





OVERCENTRE VALVE																																													
CBSN-030-PSRH				POPPET TYPE																																									
																																													
																																													
		SPECIFICATIONS <table><tr><td>Max. operating pressure:</td><td>350 bar</td></tr><tr><td>Rated flow:</td><td>30 l/min</td></tr><tr><td>Cavity:</td><td>VP000161 (SUN T-11A)</td></tr><tr><td>Weight:</td><td>0,15 kg</td></tr></table>		Max. operating pressure:	350 bar	Rated flow:	30 l/min	Cavity:	VP000161 (SUN T-11A)	Weight:	0,15 kg																																		
		Max. operating pressure:	350 bar																																										
		Rated flow:	30 l/min																																										
		Cavity:	VP000161 (SUN T-11A)																																										
		Weight:	0,15 kg																																										
SEALING CAP <table><tr><td>Ordering code:</td><td rowspan="2">  </td></tr><tr><td>AT000020</td></tr></table>		Ordering code:		AT000020																																									
Ordering code:																																													
AT000020																																													
NOTES <table><tr><td>Setting: at least 1.3 times the load induced pressure</td></tr><tr><td>Installation torque: 40 - 50 Nm</td></tr><tr><td>Turn anticlockwise to increase the setting</td></tr><tr><td>Seal kit: RC700161</td></tr></table>		Setting: at least 1.3 times the load induced pressure	Installation torque: 40 - 50 Nm	Turn anticlockwise to increase the setting	Seal kit: RC700161																																								
Setting: at least 1.3 times the load induced pressure																																													
Installation torque: 40 - 50 Nm																																													
Turn anticlockwise to increase the setting																																													
Seal kit: RC700161																																													
ORDERING CODES <table><tr><th>Quick code</th><th>Description</th><th>Pilot ratio</th><th>Standard setting (bar, Q=5 l/min)</th><th>Adjust. range (bar)</th><th>Pressure increase (bar/turn)</th></tr><tr><td>CB000036</td><td>CBSN-030-PSRH-04-161-N350</td><td>4:1</td><td>350</td><td>120 - 350</td><td>148</td></tr><tr><td>CB000037</td><td>CBSN-030-PSRH-04-161-N200</td><td>4:1</td><td>200</td><td>70 - 210</td><td>72</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>				Quick code	Description	Pilot ratio	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)	CB000036	CBSN-030-PSRH-04-161-N350	4:1	350	120 - 350	148	CB000037	CBSN-030-PSRH-04-161-N200	4:1	200	70 - 210	72																								
Quick code	Description	Pilot ratio	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)																																								
CB000036	CBSN-030-PSRH-04-161-N350	4:1	350	120 - 350	148																																								
CB000037	CBSN-030-PSRH-04-161-N200	4:1	200	70 - 210	72																																								