

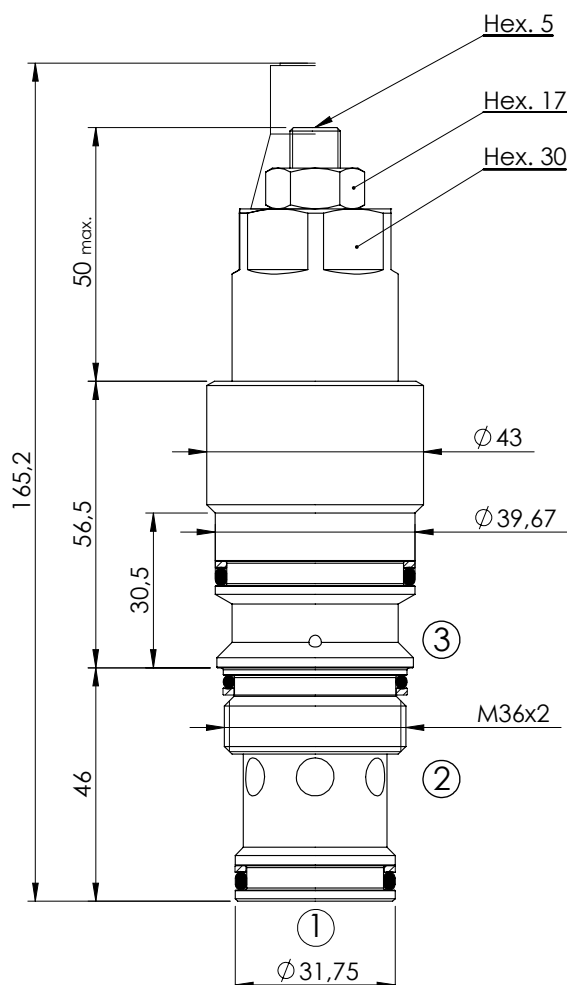




OVERCENTRE VALVE

CBSN-240-DSGH**POPET TYPE
DIFFERENTIAL AREA****SPECIFICATIONS**

Max. operating pressure:	350 bar
Rated flow:	240 l/min
Cavity:	VP000166 (SUN T-17A)
Weight:	0,73 kg

SEALING CAP

Ordering code:
AT000021

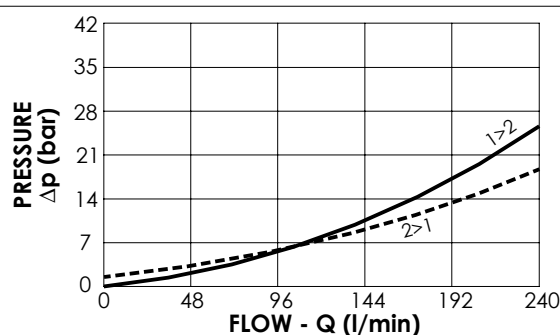**NOTES**

Setting: at least 1.3 times the load induced pressure

Installation torque: 135 - 150 Nm

Turn anticlockwise to increase the setting

Seal kit: RC700166

ORDERING CODES

Quick code	Description	Pilot ratio	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)
CB000028	CBSN-240-DSGH-04-166-N350	4:1	350	140-350	114