
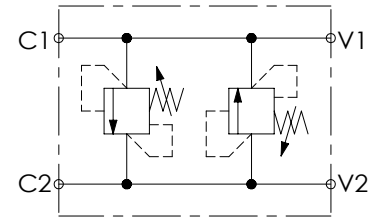
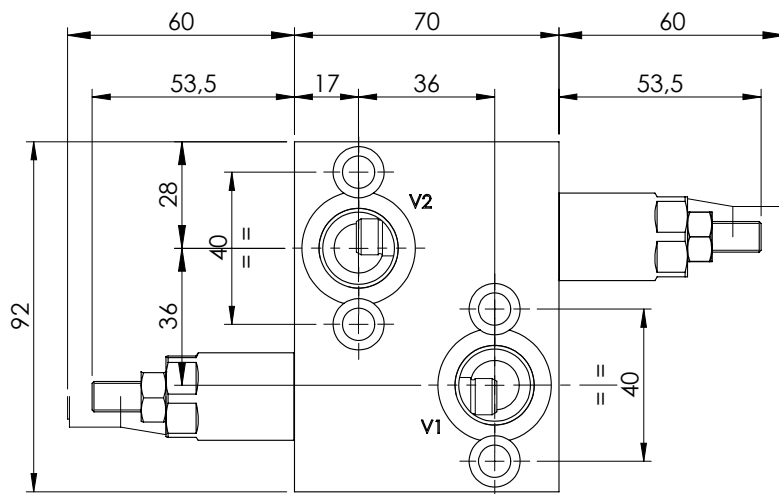



VALVES FOR MOTORS OR HYDRAULIC ACTUATORS

**MADN-030-TBNR**

DOUBLE ANTISHOCK


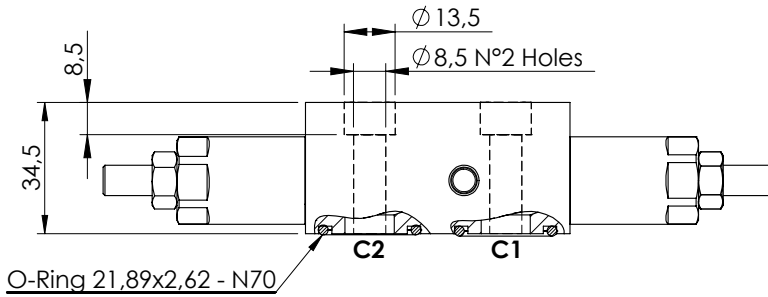


**SPECIFICATIONS**

Max. operating pressure:	210 bar
Rated flow:	30 l/min
Manifold:	Aluminium
Weight:	0,76 kg

**SEALING CAP**

Ordering code:  
AT000020

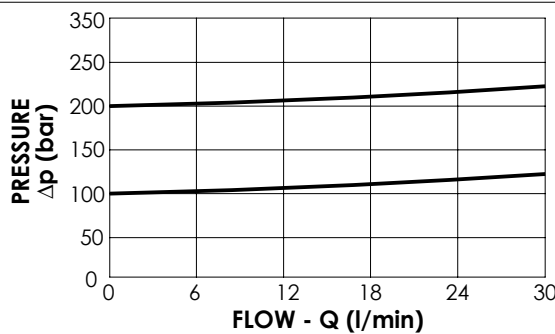

**NOTES**

Setting: at least 1.3 times the load induced pressure  
Designed for DANFOSS motors OMP-OMR series.

**ORDERING CODES**

Quick code	Description	Main ports size	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)
MA000012	MADN-030-TBNR-HN-G12-N210	V1,V2: G 1/2" C1,C2: $\phi 13$	200	50-210	42
MA000022	MADN-030-TBNR-HN-G12-N100	V1,V2: G 1/2" C1,C2: $\phi 13$	100	30-100	20