
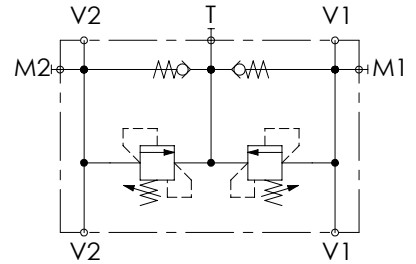
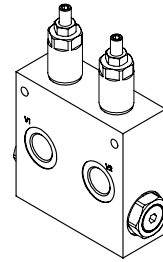


VALVES FOR MOTORS OR HYDRAULIC ACTUATORS

**MADN-040-LLNR**

DUAL CROSS OVER  
ANTICAVITATION RELIEF


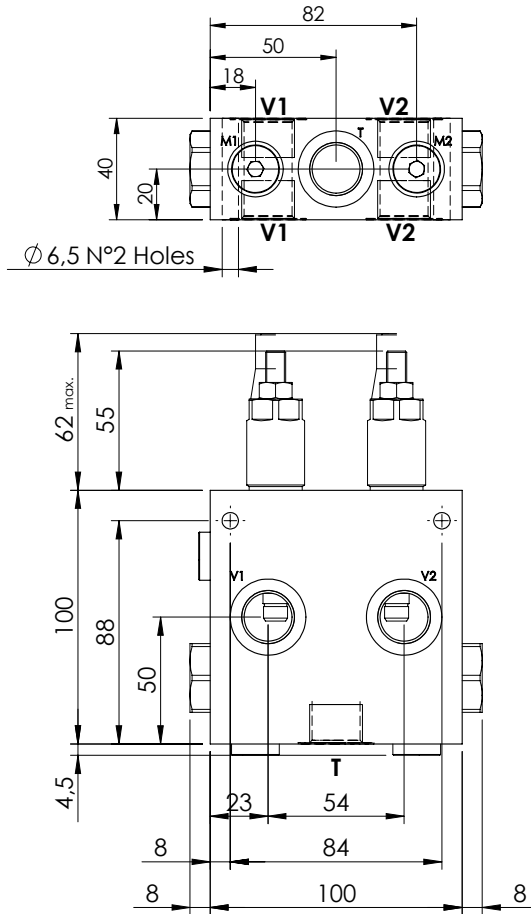


**SPECIFICATIONS**

Max. operating pressure:	210 bar
Rated flow:	40 l/min
Manifold:	Aluminium
Weight:	1,32 kg

**SEALING CAP**

Ordering code:  
**AT000020**

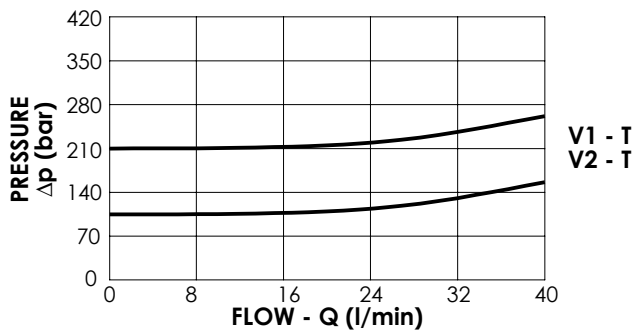

**NOTES**

Setting: at least 1.3 times the load induced pressure

**ORDERING CODES**

Quick code	Description	Main ports size	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)
MA000054	MADN-040-LLNR-HN-G12-N200	V1,V2,T: G1/2" M1,M2: G1/4"	200	50-210	42
MA000055	MADN-040-LLNR-HN-G12-N100	V1,V2,T: G1/2" M1,M2: G1/4"	100	30-100	20