


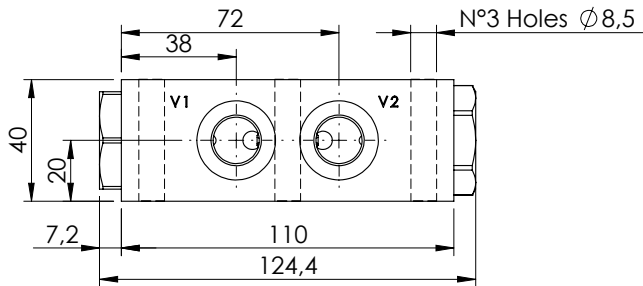
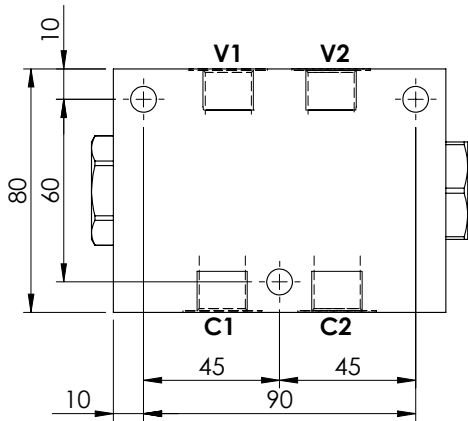


VALVES FOR MOTORS


MBDN-055-GLNR

COUNTERBALANCE

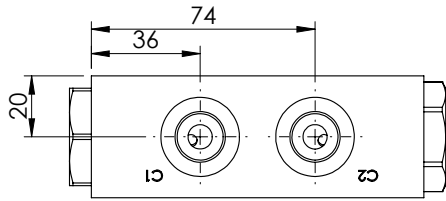

SPECIFICATIONS

| | |
|--------------------------|-----------|
| Max. operating pressure: | 350 bar |
| Rated flow: | 55 l/min |
| Manifold: | Cast iron |
| Weight: | 2,53 kg |

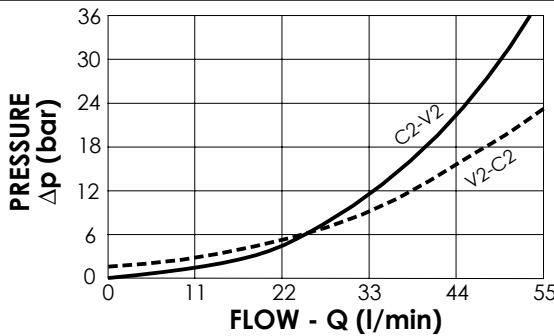

NOTES

Designed for traction control of small undercarriages

ORDERING CODES

| Quick code | Description | Main ports size | Standard setting (bar, Q=5 l/min) | Adjust. range (bar) | Pressure increase (bar/turn) |
|------------|---------------------------|---------------------|-----------------------------------|---------------------|------------------------------|
| MB000112 | MBDN-055-GLNR-01-G38-N006 | V1,V2,C1,C2 : G3/8" | 6 | Fixed setting | NO |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |