
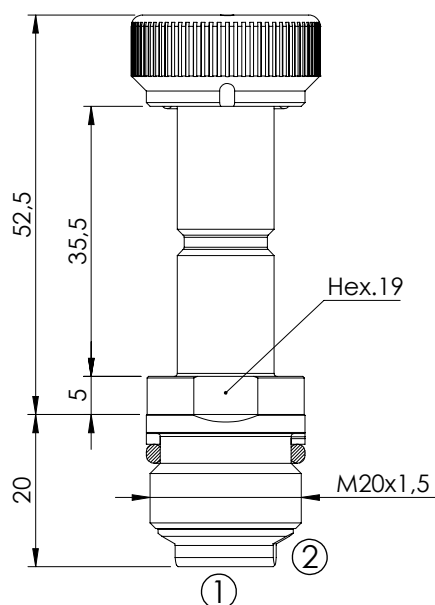
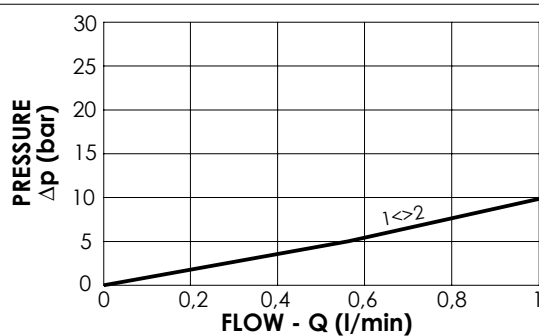


SOLENOID OPERATED CARTRIDGE

CEBN-001-NCFN**DIRECT OPERATED
POPPET TYPE****NEW****SPECIFICATIONS**

Max. operating pressure:	350 bar
Rated flow:	1 l/min
Cavity:	VP000445
Weight:	0,1 kg
Min. voltage required:	90% of nominal
Coil type:	M7 type
Seal kit:	RC700445

**NOTES**

Installation torque:	40 - 45 Nm
----------------------	------------

ORDERING CODES

Quick code	Description	Max operating pressure (bar)	
CE000871	CEBN-001-NCFN-16-445-N350	350	