
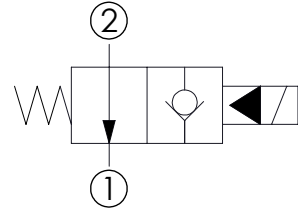



SOLENOID OPERATED CARTRIDGE

CEBN-180-NAFN

**PILOT OPERATED
POPPET TYPE**

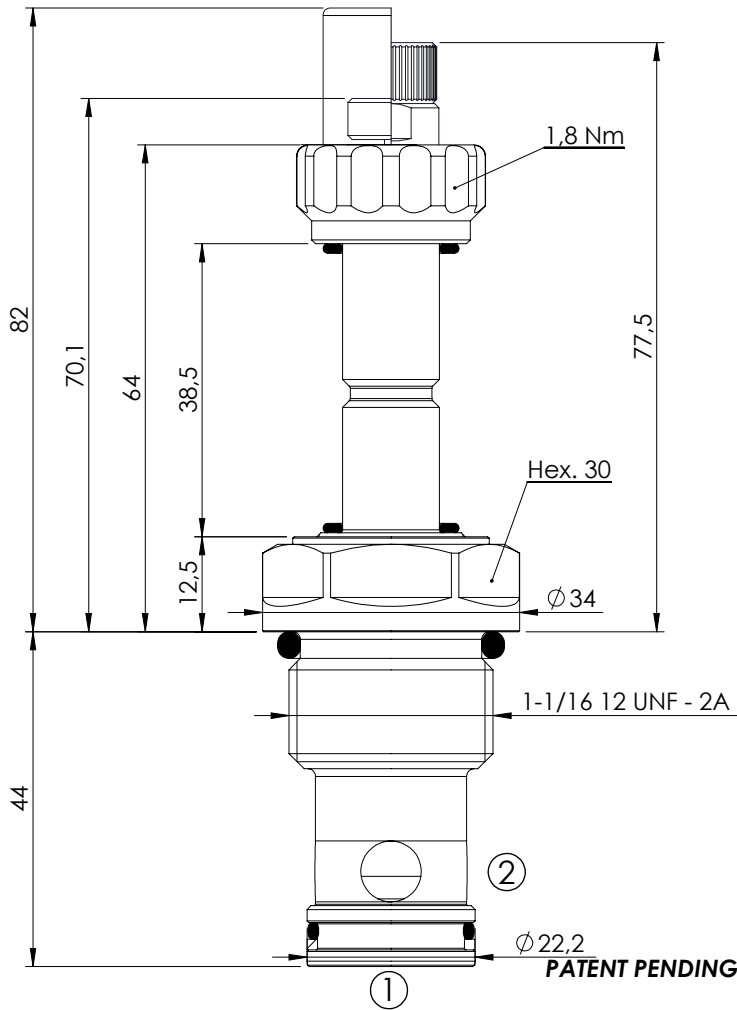




SPECIFICATIONS

Max. operating pressure:	350/500 bar
Rated flow:	180 l/min
Cavity:	SAE-12-2N
Weight:	0,25 kg
Min. voltage required:	90% of nominal
Coil type:	M7 type
Seal kit:	RA900083


NOTES

Installation torque: 135 - 150 Nm


OPTIONS

-  Standard
-  Push style override
-  Knob style override

SEALING CAP



Ordering code:
AT000113

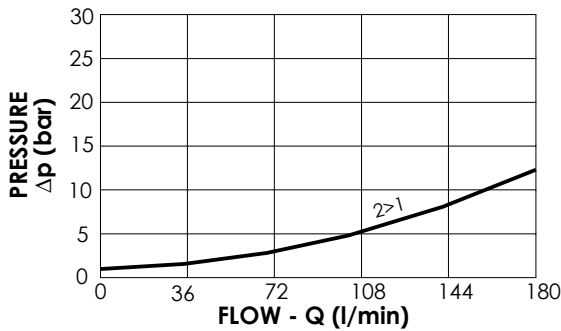

ORDERING CODES

Quick code	Description	Options	Max operating pressure (bar)	
CE000335	CEBN-180-NAFN-02-S12-N350	Standard	350	
CE000336	CEBN-180-NAFP-02-S12-N350	Push style override	350	
CE000337	CEBN-180-NAFK-02-S12-N350	Knob style override	350	
CE000635	CEBN-180-NAFN-02-S12-N500	Standard	500	
CE000636	CEBN-180-NAFP-02-S12-N500	Push style override	500	
CE000637	CEBN-180-NAFK-02-S12-N500	Knob style override	500	