SOLENOID OPERATED CARTRIDGE

CEES-010-SEFN

DIRECT OPERATED SPOOL TYPE

Atlantic Fluid Tech

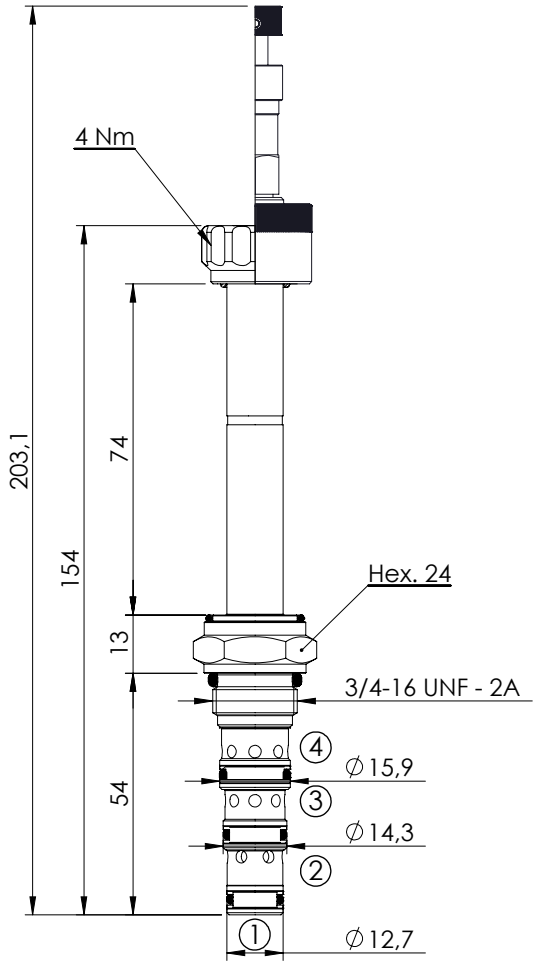





SPECIFICATIONS

Max. operating pressure:	**210 bar**
Rated flow:	**10 l/min**
Cavity:	**SAE-08-4N**
Weight:	**0,18 kg**
Min. voltage required:	**90% of nominal**
Coil type:	**M7 type**
Leakage:	**120cm³/min**
Seal kit:	**RB700101**

NOTES

Installation torque:	**45 - 50 Nm**

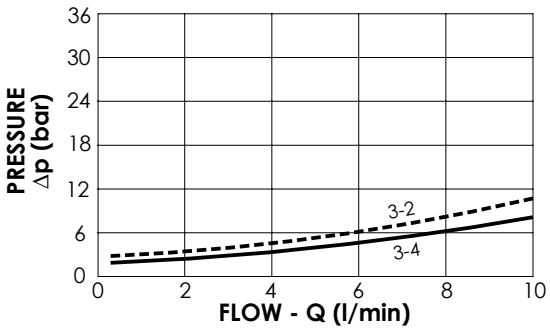

OPTIONS

Standard



Push and pull manual override



Push pull and twist manual override

ORDERING CODES

Quick code	Description	Options	
CE000028	**CEES-010-SEFN-51-S08-N210**	**Standard**	
CE000098	**CEES-010-SEFL-51-S08-N210**	**Push and pull manual override**	
CE000189	**CEES-010-SEFG-51-S08-N210**	**Push pull and twist manual override**	