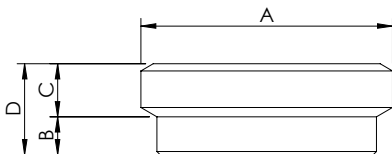



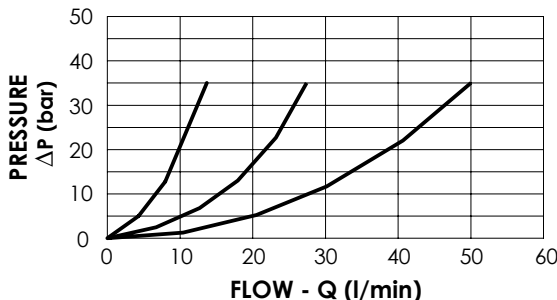


ACCESSORIES																																		
FILTER	SCREW IN FILTER																																	
  <table><tr><th>Code</th><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th></tr><tr><td>CT000002</td><td>G 3/8"</td><td>2.5</td><td>3.5</td><td>6</td><td>8</td></tr><tr><td>CT000003</td><td>G 1/4"</td><td>2</td><td>3</td><td>5</td><td>6</td></tr><tr><td>CT000004</td><td>G 1/8"</td><td>1.6</td><td>2.2</td><td>3.8</td><td>5</td></tr></table>		Code	A	B	C	D	E	CT000002	G 3/8"	2.5	3.5	6	8	CT000003	G 1/4"	2	3	5	6	CT000004	G 1/8"	1.6	2.2	3.8	5	  SPECIFICATIONS <table><tr><td>Max. operating Δp:</td><td>35 bar</td></tr><tr><td>Rated flow:</td><td>See table</td></tr><tr><td>Cavity:</td><td>See table</td></tr><tr><td>Weight:</td><td>8 g</td></tr></table> APPLICATION LIMITATIONS Not suitable for use with: -fast acting valve -cold oil -high viscosity oil -other conditions creating pressure drop greater than 35 bar	Max. operating Δp:	35 bar	Rated flow:	See table	Cavity:	See table	Weight:	8 g
Code	A	B	C	D	E																													
CT000002	G 3/8"	2.5	3.5	6	8																													
CT000003	G 1/4"	2	3	5	6																													
CT000004	G 1/8"	1.6	2.2	3.8	5																													
Max. operating Δp:	35 bar																																	
Rated flow:	See table																																	
Cavity:	See table																																	
Weight:	8 g																																	
																																		
ORDERING CODES																																		
Quick code	Description	Max. ΔP admitted (bar)	Max. flow (l/min)	Filtration (micron)	Installation torque (Nm)																													
CT000002	Filter G 3/8"	35	50	300	10																													
CT000003	Filter G 1/4"	35	25	300	5																													
CT000004	Filter G 1/8"	35	10	300	3																													